


**CURRENTLY UTILIZING
TOP DRIVE**

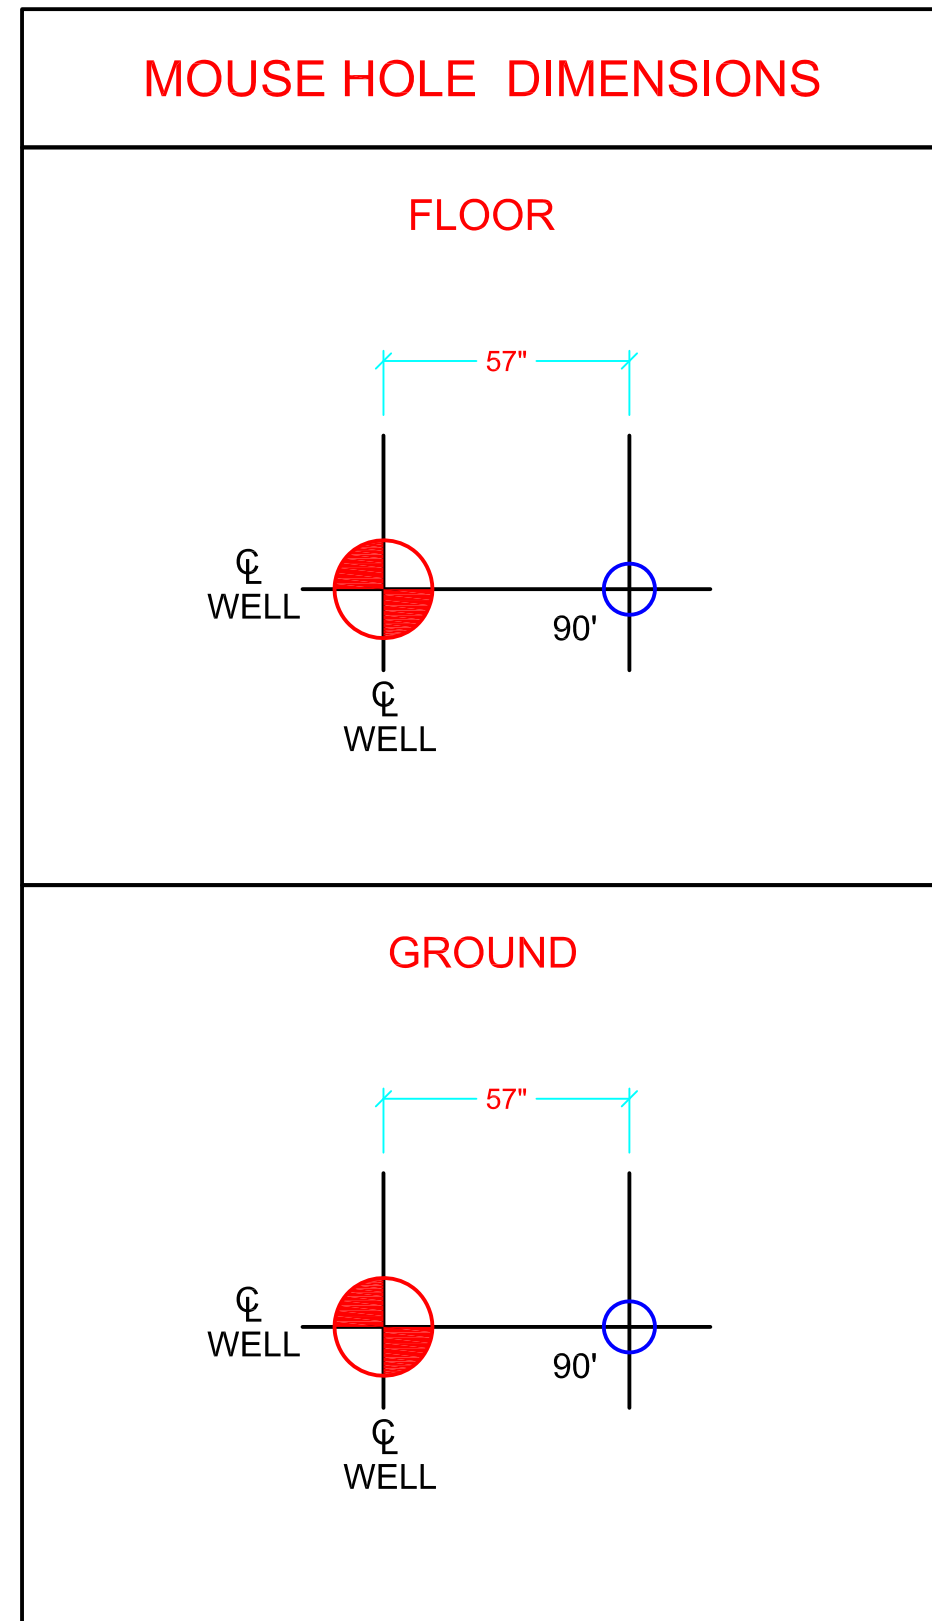

RIG FLOOR HEIGHT = 23'

THIS DRAWING IS OWNED BY AND CONTAINS PROPRIETARY INFORMATION OF CACTUS DRILLING COMPANY, L.L.C. IT IS CONDITIONALLY LOANED AND IS TO BE RETURNED UPON COMPLETION OF WORK OR UPON EARLIER REQUEST. THE BORROWER BY RECEIVING IT HAS AGREED NOT TO REPRODUCE NOR TO COPY IT IN WHOLE OR IN PART NOR TO FURNISH INFORMATION FROM IT TO OTHERS NOR TO MAKE ANY USE OF IT OR THE INFORMATION CONTAINED THEREIN EXCEPT FOR OR UNDER SPECIFIC LICENSE FROM CACTUS DRILLING COMPANY, L.L.C.

SYM	DATE	REVISION	BY	ACAD FILE: CAC166-A-003-00-RO	TOLERANCE UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES	CUSTOMER INFO:
					DECIMAL DIMENSION CONCENTRICITY	FILE: R-166_RM.dwg
					X.X ±.1 .1 F.I.R.	DWG BY: J.D.L. 2/17/2014
					X.XX ±.06 .06 F.I.R.	CHK BY:
					X.XXX ±.010 .010 F.I.R.	APP BY:
					ANGLES ± .5 DEGREES	SCALE: NTS

CACTUS Drilling Co., L.L.C.
Oklahoma City, OK, U.S.A.
Tel: 405-577-5347 Fax: 405-577-9306

TITLE: **RIG 166
RH-MH**

SIZE B **CAC166-A003** SHEET 1/1